
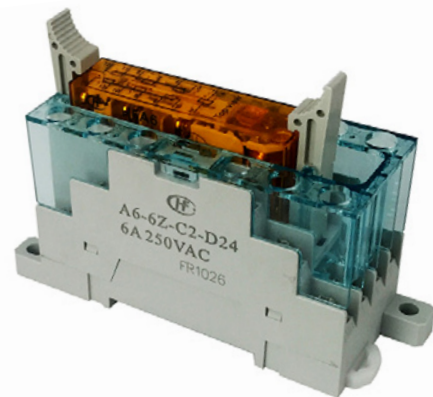


HFA4 a HFA6 safety relay with forcibly guided contacts

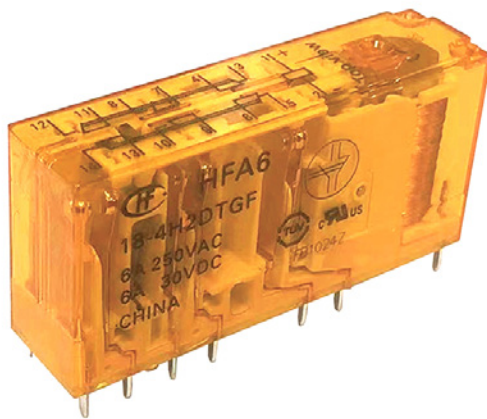

4 pin and 6 pin relay for economical solutions of security circuits
forcibly guided contacts according to EN50205


HFA4 and HFA6 safety relay with forcibly guided contacts

HFA4 technical specifications:

- 4 pin relay
- Highly compact and slim design
- Coil voltage: 24 V DC
- Contact rating: 6 A 250 V AC / 30 V DC
- Operating temperature: -40 °C.....+85 °C
- Compact dimensions (WxHxL): 40 x 24 x 13 mm
- Weight: 20 g
- Low input power: 360 mW
- Forcibly guided contacts according to EN50205




HFA4 relay

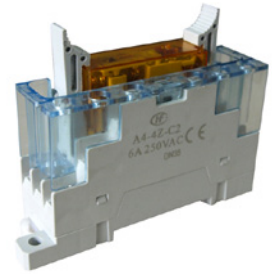

Relay socket A4-4Z-C2

HFA6 technical specifications:

- 6 pin relay
- Highly compact and slim design
- Coil voltage: 24 V DC
- Contact rating: 6 A 250 V AC / 30 V DC
- Operating temperature: -40 °C.....+85 °C
- Compact dimensions (WxHxL): 50 x 24 x 13 mm
- Weight: 23 g
- Low input power: 500 mW
- Forcibly guided contacts according to EN50205

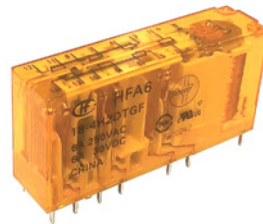

HFA6 relay



Relay socket A6-6Z-C2

Relay socket A4-4Z-C2 technical specifications:

- Socket for 4 pin relay HFA4
- Nominal voltage 250 V AC
- Screw-type brackets with finger protection

Relay socket A6-6Z-C2 technical specifications:

- Socket for 6 pin relay HFA6
- Nominal voltage 250 V AC
- Screw-type brackets with finger protection



Type	Description	Contact arrangement	Coil voltage	EUR/pc
HFA4/24-2H2D-TGF	4 pin relay,	2NO + 2NC	24 V DC	15,00
HFA4/24-3H1D-TGF	4 pin relay	3NO + 1NC	24 V DC	15,00
HFA6/24-4H2D-TGF	6 pin relay	4NO + 2NC	24 V DC	16,80
HFA6/24-5H1D-TGF	6 pin relay	5NO + 1NC	24 V DC	16,80
A4-4Z-C2	Socket for 4 pin relay with DIN rail mounting			17,40
A6-6Z-C2	Socket for 6 pin relay with DIN rail mounting			18,50